

DH-XVR4232AN-I

32 Channels Penta-brid 1080N/720P 1U 2HDDs WizSense Digital Video Recorder



WizSense

Launched by Dahua Technology, WizSense is a series of AI products and solutions that adopt independent AI chip and deep learning algorithm. It focuses on human and vehicle with high accuracy, enabling users to fast act on defined targets. Based on Dahua's advanced technologies, WizSense provides intelligent, simple and inclusive products and solutions.

Series Overview

Dahua Technology, a world-leading video-centric smart IoT solution and service provider, debuted its new XVR series, XVR4000-I Series featuring max.full-channel SMD Plus to benefit customers from AI upgrade (The number of channels differs depending on the model. Please refer to the specifications below for information on the number of channels.). This series has been developed to reduce false-alarm rates and the cost of human surveillance, thus bringing great value to customers in search of products with accurate human/vehicle alarm to raise the security level of various indoor and outdoor facilities.

Functions


SMD Plus

With intelligent algorithm, Dahua Smart Motion Detection technology can categorize the targets that trigger motion detection and filter the motion detection alarm triggered by non-concerned targets to realize effective and accurate alarm.

Smart Dual Illuminators

With Smart Dual Illuminators technology, you can select Smart Illumination Mode for the system to automatically switch between IR mode and white light mode. It allows white light to be turned on when a target is detected by the SMD Plus/Perimeter Protection function of AI-enabled XVR. This significantly reduces light pollution at night. Together with other modes, including IR Mode and White Light Mode, the smart dual illumination technology can meet the requirements of a wide variety of scenes.

- H.265+/H.265 dual-stream video compression.
- Supports 8-channel AI-Coding.
- Supports HDCVI/AHD/TVI/CVBS/IP video inputs.
- Max 16 channels IP camera inputs, each channel up to 6MP; Max 128 Mbps incoming bandwidth.
- Up to 16 channels video stream (analog channel) SMD Plus.
- Long transmission distance over coax cable.

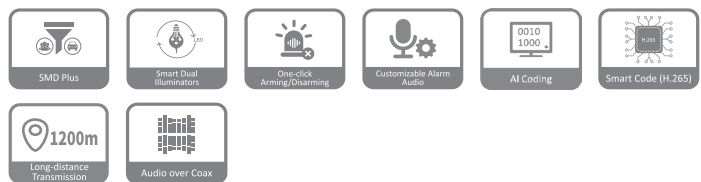

One-click Arming/Disarming

With just one click, you can enable or disable alarm linkages to show messages, send emails, output audio alarms and more, through the mobile app and platform.

Customizable Alarm Audio

Designed for your convenience, the TIOC alarm can be customized to meet your needs. It is flexible, allowing you to directly upload your customized audio through the mobile app and XVR.

AI Coding

Compared with H.265/H.264, AI coding can reduce more than 50% bit rate and storage requirements without loss of decoding compatibility, providing clear human and vehicle details.

Smart H.265+

Smart H.265+ Codec reduces bit rate and storage requirements by up to 90%, outranking standard H.264 video compression and eliminating the need to invest in a new camera.

Long-distance Transmission

The HDCVI system supports long distance transmission over coaxial cable and UTP, max. 700 m for 4K/4MP, 800 m for 1080p and 1200 m for 720p.

Audio over Coax

The integrated design can reduce wiring troubles which makes it much more cost-effective and convenient for installation.

Technical Specification

System

| | |
|---------------------|----------------------------|
| Main Processor | Industrial-grade processor |
| Operating System | Embedded Linux |
| Operating Interface | Web; Local GUI |

SMD Plus

| | |
|----------------------|--|
| SMD Plus by Recorder | 16 channels: Secondary filtering for human and motor vehicle SMD Plus, reducing false alarms caused by leaves, rain and lighting condition change |
|----------------------|--|

Audio and Video

| | |
|---------------------------|---|
| Analog Camera Input | 32 BNC ports, CVI access by default, supports HDCVI/AHD/TVI/CVBS auto-detect |
| Camera Input | HDCVI 1080P@ 25/30 fps, 720P@ 25/30 fps AHD 1080P@ 25/30 fps, 720P@ 25/30 fps TVI 1080P@ 25/30 fps, 720P@ 25/30 fps |
| IP Camera Input | Up to 16 channels of IPC access 16 channels (analog channels are converted to IP channels) incoming bandwidth: 128 Mbps, recording bandwidth: 128 Mbps and outgoing bandwidth: 128 Mbps |
| Encoding Capacity | Main Stream: the 1st channel 1080N/720P (1 fps–25/30 fps), others 1080N/720P (1 fps–15 fps); 960H/D1/CIF (1 fps–25/30 fps) Sub stream: CIF (1 fps–7 fps) |
| Dual-stream | Yes |
| Video Bit Rate | 32 kbps–6144 kbps per channel |
| Audio Sampling | 8 kHz, 16 bit |
| Audio Bit Rate | 64 kbps |
| Video Output | 1 HDMI, 1 VGA, 1 TV VGA: 1920 × 1080, 1280 × 1024, 1280 × 720 HDMI: 1920 × 1080, 1280 × 1024, 1280 × 720 |
| Multi-screen Display | 1/4/8/9/16/25/36 |
| Third-party Camera Access | Onvif, Panasonic, Sony, Axis, Arecont, Pelco, Canon, Samsung |

Compression Standard

| | |
|-------------------|---|
| Video Compression | AI Coding; H.265+; H.265; H.264+; H.264 |
| Audio Compression | G.711A; G.711u; PCM |

Network

| | |
|---------------------|---|
| Network Protocol | HTTP; HTTPS; TCP / IP; IPv4; RTSP; UDP; SMTP; NTP; DHCP; DNS; DDNS; P2P |
| Mobile Phone Access | iOS, Android |
| Interoperability | ONVIF 21.06, CGI |
| Browser | Chrome, IE9 or above, Firefox |
| Network Mode | Single-address mode |

Recording Playback

| | |
|--------------------|---|
| Record Mode | General, motion detection; intelligent; alarm |
| Recording Playback | 1/4/9/16 |
| Backup Method | USB device and network |

| | |
|---------------|--|
| Playback Mode | Instant playback, general playback, event playback, tag playback, smart playback |
|---------------|--|

Storage

| | |
|------------|-----|
| Disk Group | Yes |
|------------|-----|

Alarm

| | |
|---------------|--|
| General Alarm | Motion detection, video loss, tampering |
| Anomaly Alarm | No disk, storage error, low space, offline, IP conflict, MAC conflict |
| Alarm Linkage | Record, snapshot (panoramic), IPC external alarm output, access controller, voice prompt, buzzer, log, preset, email |

Ports

| | |
|---------------|---|
| TV Output | 1 channel |
| Audio Input | 1-channel RCA (external) 32-channel BNC (coaxial audio) |
| Audio Output | 1, RCA |
| Two-way Talk | Yes (share the same audio input with the first channel) |
| HDD Interface | 2 SATA ports, up to 16 TB, the maximum HDD capacity varies with environment temperature |
| RS-485 | 1 |
| USB | 2 (1 front USB 2.0 port, 1 rear USB 3.0 port) |
| HDMI | 1 |
| VGA | 1 |
| Network Port | 1 (10/100/1000 Mbps Ethernet port, RJ-45) |



General

| | |
|-----------------------|--|
| Power Supply | 12 VDC, 4 A |
| Power Consumption | Lower than 12 W (without HDD) |
| Net Weight | 1.92 kg (4.23 lb) |
| Gross Weight | 3.09 kg (6.81 lb) |
| Product Dimensions | 1U, 375.0 mm × 289.4 mm × 53.0 mm (14.76" × 11.40" × 2.09") (W × D × H) |
| Packaging Dimensions | 433.0 mm × 141.0 mm × 366.0 mm (17.05" × 5.55" × 14.41") (W × D × H) |
| Operating Temperature | –10 °C to +55 °C (14 °F to +131 °F) |
| Operating Humidity | 0%–90% (RH) |
| Installation | Desktop |
| Certifications | CE: CE-LVD: EN 60950-1/IEC 60950-1 CE-EMC: EN 61000-3-2, EN 61000-3-3, EN 55032, EN 50130, EN 55024 FCC: Part 15 Subpart B |


Ordering Information

| Type | Model | Description |
|-----------------------------|----------------|---------------------------|
| 32 Channels WizSense XVR | DH-XVR4232AN-I | 1U DIGITAL VIDEO RECORDER |

Dimensions (mm[inch])

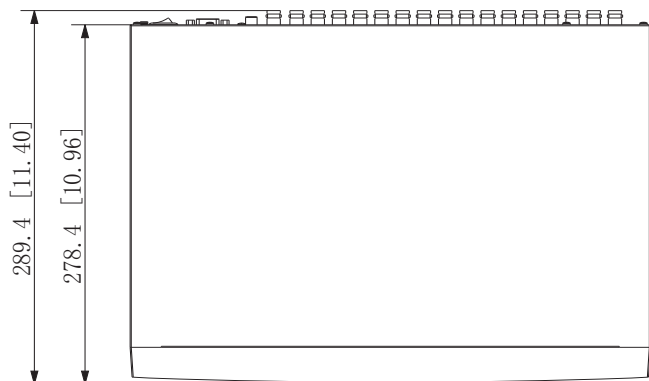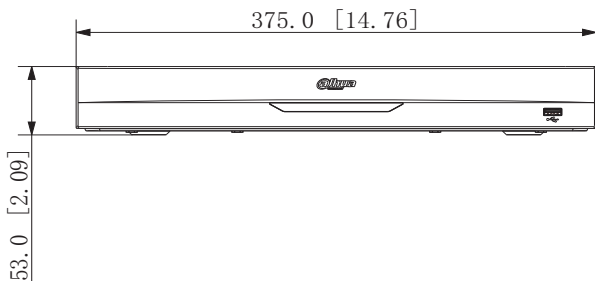

Panels

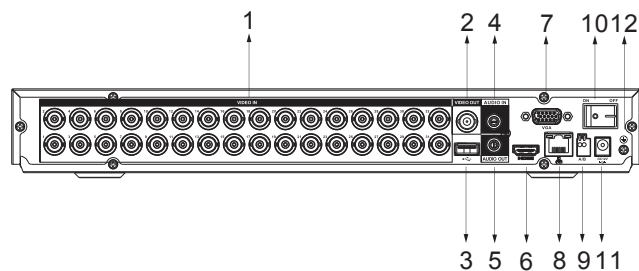

- | | |
|-----------------------|-----------------|
| 1 Video In | 2 Video Out |
| 3 USB Port | 4 Audio In |
| 5 Audio Out | 6 HDMI Port |
| 7 VGA Port | 8 Network Port |
| 9 RS-485 Port | 10 Power Switch |
| 11 DC 12V Power Input | 12 Ground |